



VENT FREE FIREPLACE SYSTEMS

 Monessen

WARM WELCOME

Nothing invites or delights like the dancing flames of a fire. For thousands of years fire has been the focal point of hearth and home and, like so many families before, we invite you to sit by ours and enjoy their warmth and beauty.



DFX24C with standard black trim and Cottage Clay firebrick



DBX24C with optional face plate, Brass louvers and Cottage Clay firebrick

VENT FREE FIREPLACE SYSTEMS

Enhancing your home with the beauty of fire is now easier than ever with a DFX vent free fireplace system from Monessen. These simple and safe fireplace solutions have slim 12 inch deep profiles offer a compact traditional fireplace design available in 24 and 32 inch sizes. With standard black trim and louvers, these easy to install vent free fireplace systems from Monessen are perfectly suited to just about any location in your home.

Our DFS series of vent free fireplace systems from Monessen offer a full sized fireplace in 32, 36 and 42 inch sizes that make fire the focal point of your room again. With an easy to use deluxe control panel, BTU's ranging from 26,000 – 38,000, and a wide variety of optional accessories to choose from including interior firebrick choices, decorative face options and trim finishes, the DFS vent free fireplace systems from Monessen are an elegant way to warm up any room in your home.



DFX32C shown with optional Honey Oak mantel and Cottage Clay firebrick



DFSC shown with black arched front, Brushed Pewter door frame, black firescreen doors and optional Cottage Red firebrick



DFS shown with standard black trim and Cottage Clay firebrick

VENT FREE INSERT

The DIS vent free fireplace insert from Monessen is the perfect way to bring your existing wood burning fireplace to life again without the hassle of making a wood fire. This easy to install vent free insert will fit most standard masonry fireplaces with a minimum opening of 24 inches high and 33 inches wide. Available with standard black or optional Brass trim and louvers as well as an optional Brass face, this insert offers an impressive BTU range from 19,000 to 28,000 keeping up to 950 square feet warm and cozy.



DIS vent free fireplace insert

STANDARD FEATURES:

- New Triple Play Burner System® with exclusive triple effect technology producing a full random yellow flame, full depth ember bed and glowing logs
- Millivolt with on/off switch and variable flame height control
- Flexible connector with On/Off valve included
- No venting required for ease of installations
- Consumer friendly deluxe control panel with easy lift off access for blower installation
- Fixed safety screen
- Junction box included for electrical hook up

DBX

- Thermostat control operation
- Single burner design with 10,000 BTU for bedroom applications
- Black trim and black louvers standard
- 10 1/2" overall depth

DFX

- Available in two sizes 24" and 32"
- DFX24 22,000 BTU and DFX32 26,000 BTU
- Black trim and black louvers standard
- DFX24 10 1/2" overall depth and DFX32 12" depth
- Optional firebrick and face plates available

DFS

- Available in three sizes 32", 36" and 42" units
- Available with 38,000 BTU natural gas and 34,000 BTU propane Gas
- Black trim and louvers standard
- DFS32 has 16" overall depth; DFS36 & DFS42 have 18" overall depth
- Optional firebrick and face options available
- Can be field converted from circulation to radiant with optional radiant panels

DIS

- Cottage Clay firebrick standard
- Minimum fireplace opening 33"W x 24"H
- Thermostatically controlled blower

Optional Accessories

- DBX and DFX available with optional Cottage Clay firebrick
- DFS available with optional Cottage Clay and Cottage Red firebrick
- BLOT variable thermostat forced air blower for DFX32 and DFS units
- BLO24TB variable thermostat dual blower for DBX unit
- BLO24T variable thermostat dual blower for DFX24 unit
- Polished Brass louvers for DBX, DFX, DIS units
- Polished Brass and Pewter louvers for DFS units
- Black face plate for DBX model
- Black, Brass and Pewter curved and medium trim for DFS models
- Classic and Manor faces available for DFS fireplaces
- Corner or wall cabinets available for DFX and DFS units
- Two sizes of face plates for DIS insert: 43"W x 33"H and 50"W x 36"H
- Multi-functional Ambient Technologies® remote controls available for all units



Variable thermostat controlled forced air blower (135 cfm)

Programmable wireless wall thermostat with receiver



Standard thermostat ON/OFF remote control, with backlighting, temperature display, ON indicator, low battery indicator and thermal shutdown.




Cottage Red firebrick




Cottage Clay firebrick



Brass louvers



Pewter louvers

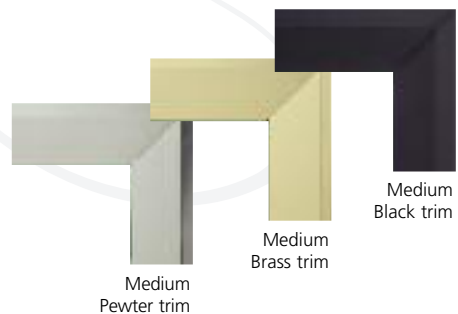

Medium Pewter trim

Medium Brass trim

Medium Black trim

See our Ambient Technologies® catalog for a complete line of remotes and thermostats.

Vent Free Fireplace Systems

Model	DFX24C	DFX32C	DBX24C
BTU / HR (Millivolt Control)	17,000 - 22,000 NG / 17,000 - 22,000 LP	20,000 - 26,000 NG / 20,000 - 26,000 LP	
BTU / HR (Thermostat Control)			10,000 - 10,000 NG / 10,000 - 10,000 LP
Heat Efficiency	99%	99%	99%
Dimensions (Actual)	24 1/2"W x 26 1/2"H x 10 1/2"D	32"W x 30"H x 12"D	24 1/2"W x 26 1/2"H x 10 1/2"D
Dimensions (Framing)	24 3/4"W x 26 3/4"H x 10 1/2"D	32 1/2"W x 30 1/4"H x 12 1/4"D	24 3/4"W x 26 3/4"H x 10 1/2"D
Viewing Area	26 1/2"W x 26 1/2"H (700 sq. inches)	30"W x 30"H (900 sq. inches)	17 1/3"W x 17 1/3"H (300 sq. inches)

Model	DFS32C	DFS36C	DFS42C
BTU / HR (Millivolt Control)	26,000 - 38,000 NG / 26,000 - 34,000 LP	26,000 - 38,000 NG / 26,000 - 34,000 LP	26,000 - 38,000 NG / 26,000 - 34,000 LP
Thermal Efficiency	99%	99%	99%
Dimensions (Actual)	37"W x 34 1/2"H x 16"D	41"W x 34 1/2"H x 18"D	47"W x 34 1/2"H x 18"D
Dimensions (Framing)	37 1/4"W x 35"H x 15 1/2"D	41 1/4"W x 35"H x 17 1/2"D	47 1/4"W x 35"H x 17 1/2"D
Opening Height	21 3/4"H	21 3/4"H	21 3/4"H
Radiant or Circulating	Both	Both	Both

Model	DIS Insert Only	Small Face Plate	Large Face Plate
BTU / HR (Millivolt Control)	19,000 - 28,000 NG / 23,000 - 28,000 LP		
Thermal Efficiency	99%	99%	99%
Dimensions (of Front)	33"W x 26 3/4"H x 16 1/2"D	43 1/4"W x 33"H	50 1/4"W x 36"H
Dimensions (of Back)	22 3/4"W x 23 7/8"H x 16 1/2"D		
Viewing Area	950 sq. inches		

*Note: Faceplate adds 1/2" for a total depth of 17"



A Brand of Monessen Hearth Systems Co.
149 Cleveland Drive, Paris, Kentucky 40361

www.monessenhearth.com

Your Monessen Dealer:

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2008 Monessen Hearth Systems Co.